



Variable resolution or
lateral boundary conditions

Terry Davies Dynamics Research

Yongming Tang, Junichi Ishida



- Variable Resolution / Nested models
- Case Studies
 - with one-way nested UM NWP
 - with variable resolution UM

Variable Resolution



Grid Structure

Grid varies from coarse resolution at the outer boundaries smoothly to a uniform fine resolution in the interior of the domain

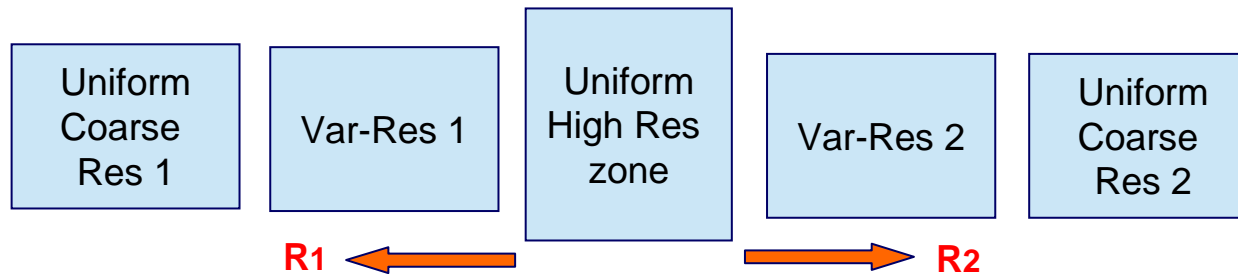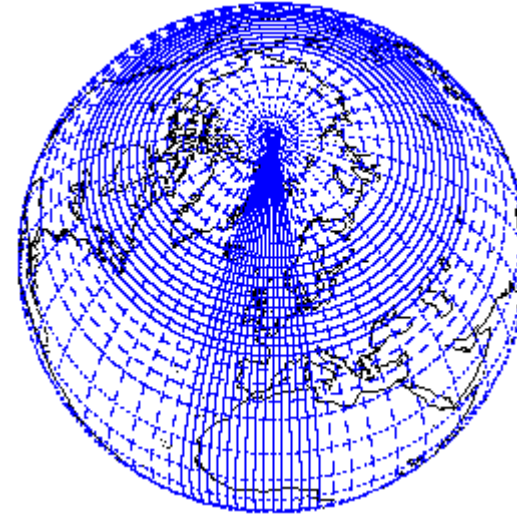


Typically, there are 3 regions, and ***inflation ratio*** $R1 = R2 = 5\sim 10\%$

e.g. $= 1 \text{ km}, R1 = R2 = 10 \%$


$N_{vr} = 34 / 24 / 15 \text{ points} \rightarrow$
 $= 25 / 10 / 4 \text{ km}$

Variable Resolution

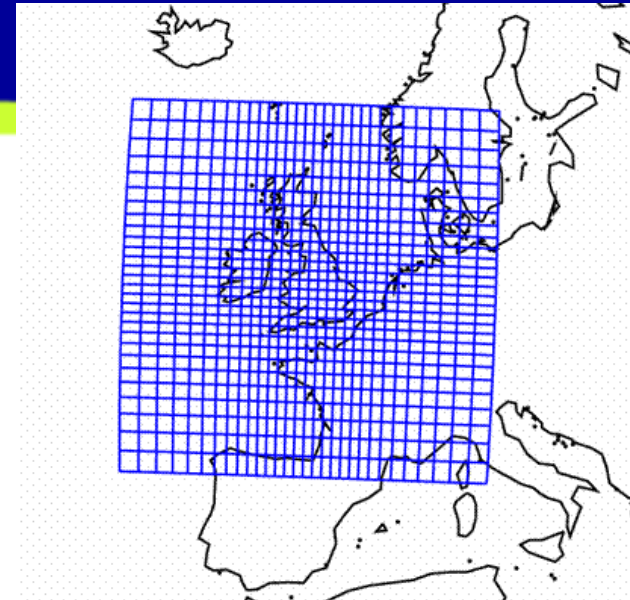

Grid Structure

Grid varies from coarse resolution at the outer boundaries smoothly to a uniform fine resolution in the interior of the domain

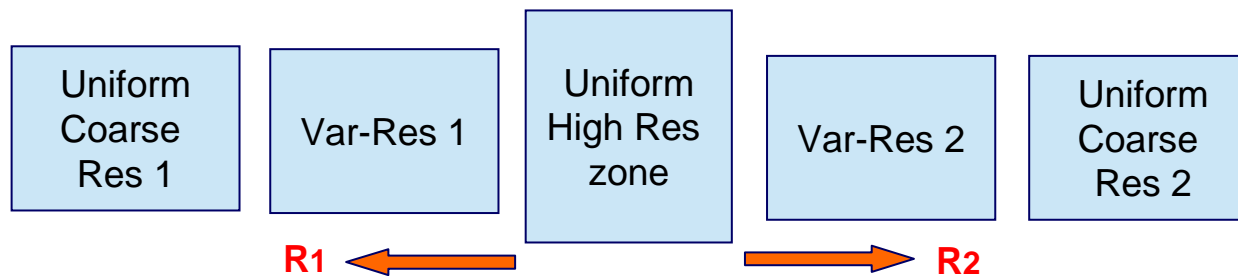

Typically, there are 3 regions, and **inflation ratio** $R1 = R2 = 5\sim 10\%$

e.g. $\Delta x = 1 \text{ km}$, $R1 = R2 = 10 \%$
 $N_{vr} = 34 / 24 / 15 \text{ points} \rightarrow$
 $= 25 / 10 / 4 \text{ km}$



Forecasting precipitation from severe convection

- Parametrized convection – **limited success**
- Very high resolution models (over a small domain), with detailed controlling factors, such as surface forcing and orography – **promising**
- Nesting -- typically 3 - 5:1
 - Requires a smooth transition
 - Mismatch of grids and model physics (e.g. coarse resolution model does not explicitly represent convection).
 - Possible solution: **variable resolution ?**



NWP Model Orography





12 km

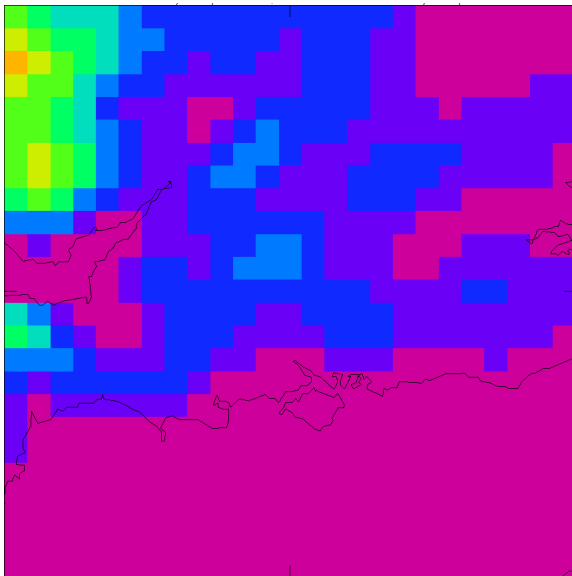

4 km

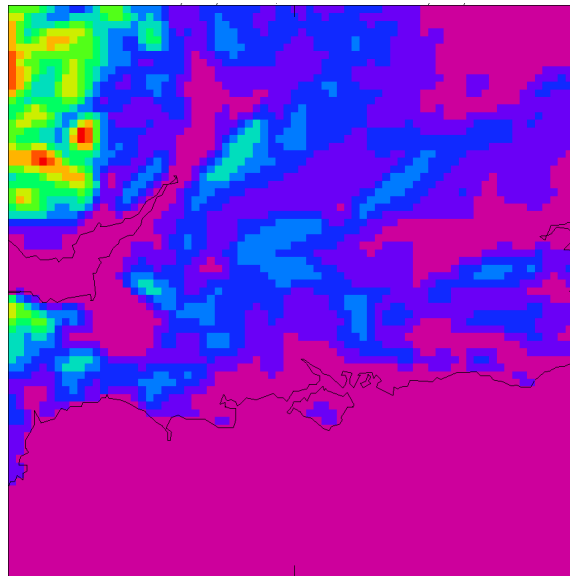

1 km

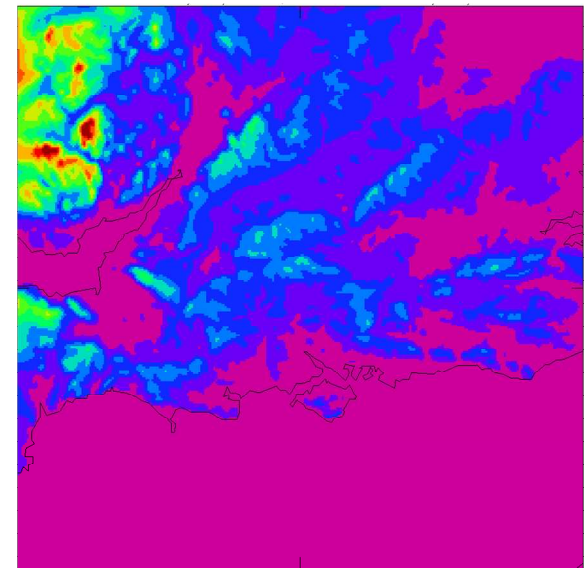

Height of model orography (m)

3rd May 2002 case

- **May 3 2002 case is a scattered convection case.**
- **To compare 1 km to 4 km variable resolution to a 1 km model nested inside a 4 km model .**

- **First, the conventional nested model.**

May 3 2002 Case ----- Nested model








12 km

4 km

1 km

Radar

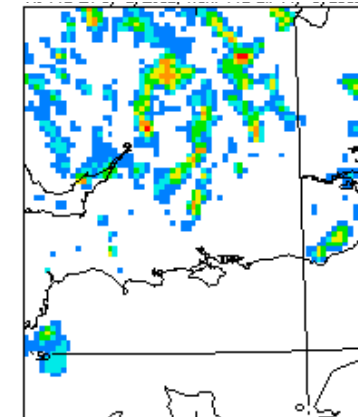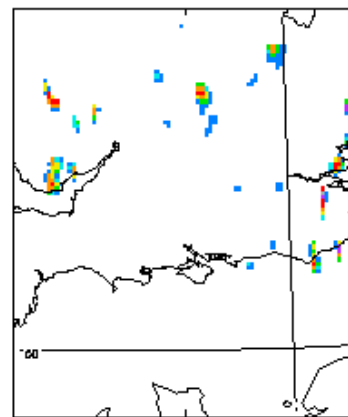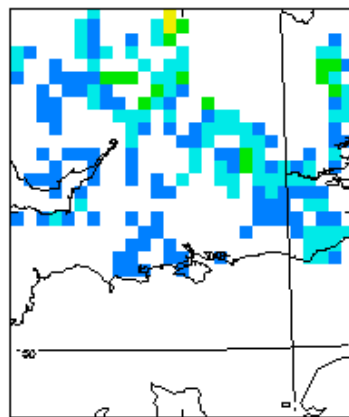

1 km high resolution nested model and radar rainfall at 14 UTC

May 3 2002 Case ----- Nested model








12 km

4 km

1 km

Radar

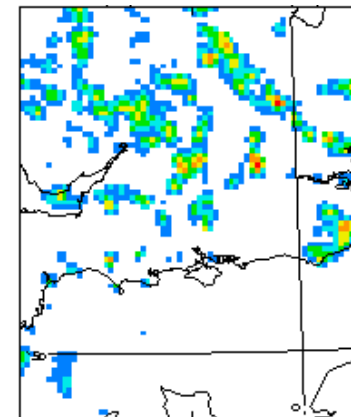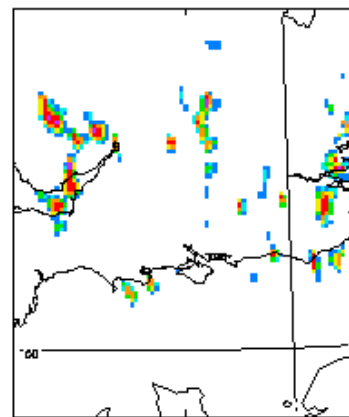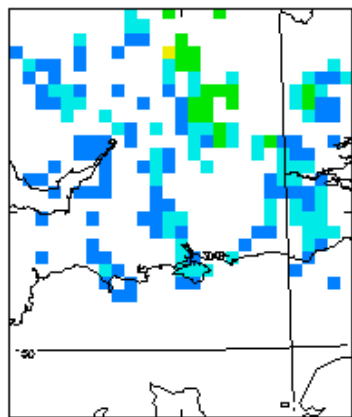


1 km high resolution nested model and radar rainfall at 15 UTC

3rd May 2002 case

- Nested models suffered two major problems:
 - **Spin up problem:** at the inflow boundaries (northern) the nested model is too slow to produce convection.
 - **Transition problem:** at the end of the run when finally the large convection cells are being advected in from the 4 km model, they remain as large cells in the north.

- **How well will variable resolution model do ?**

May 3 2002 Case ----- variable resolution model

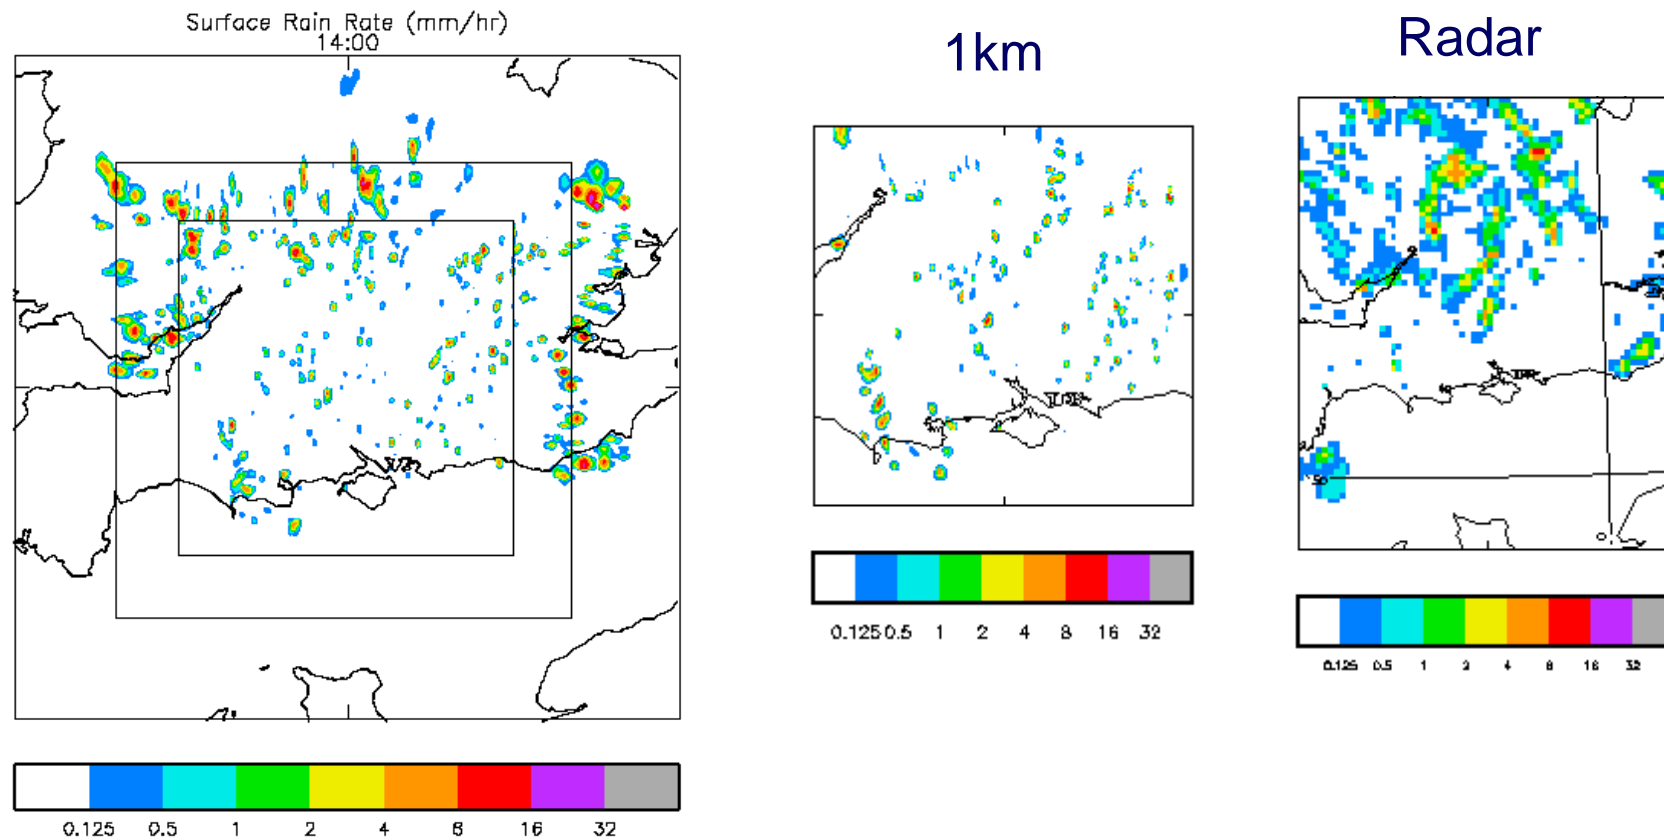

Rainfall at 14 UTC. The three regions of the variable resolution domain are also shown




May 3 2002 Case

----- variable resolution model



1km

Radar

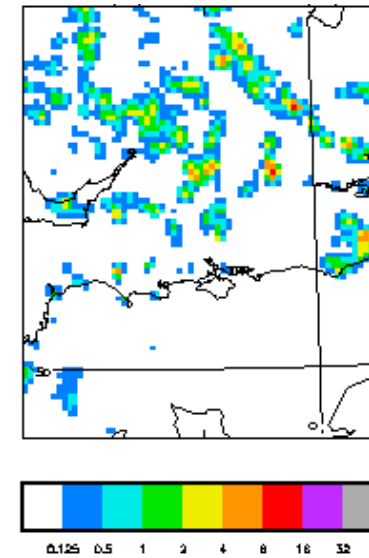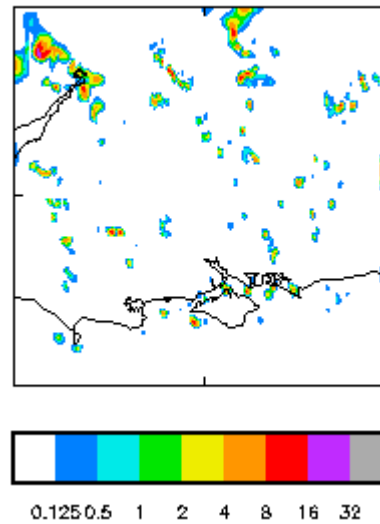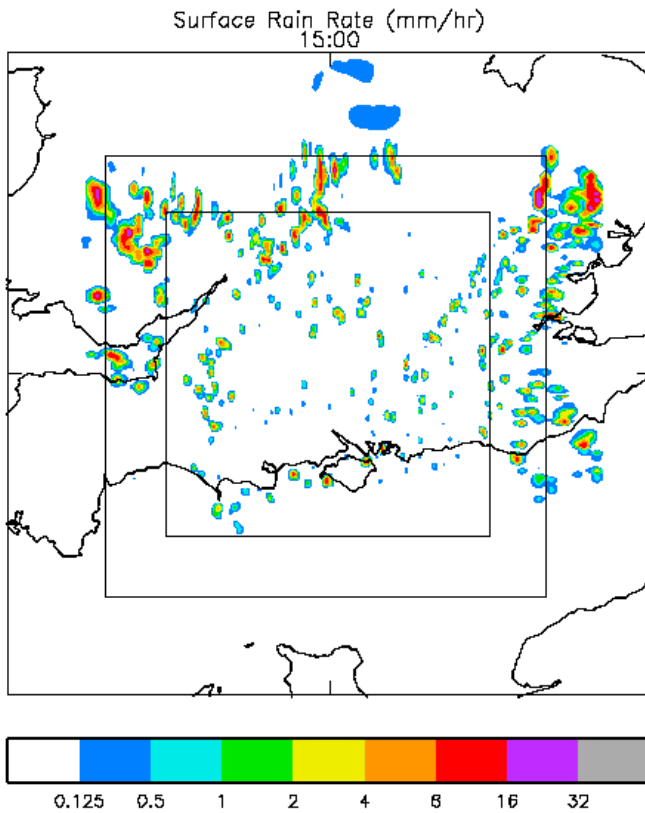

Rainfall at 15 UTC. The three regions of the variable resolution domain are also shown

- In the variable resolution model, when the ratio of the minimum and maximum grid is the same as a conventional nesting ratio of 1 : 4, it performs better in resolving convective scale storms. In particular it has overcome the problems of **spin up** and **transition**, highlighted in the nested model.
- Further study is needed on the physical parametrization schemes if **ratio > 4**.
- **We are currently working on a grid-scale dependent convection scheme.**

- **To run variable resolution LAM will still need lbc's.**
- **Current lbc's use standard blending technique (Davies)**
- **Semi-Lagrangian predictor applies lbc's naturally using time level n**
- **Apply appropriate lbc's to Helmholtz equation**
- **Need to filter small-scale outflow information**

Semi-Lagrangian predictor applies lbc's naturally

- **Up-winding scheme so lbc's only applied at in-flow (if departure point is inside domain then lateral boundaries are not used)**
- **Departure points outside domain obtained from lateral boundaries but use time-level n information, not time-level $n+1$ (time-level $n+1/2$ used for trajectories)**

- **Apply appropriate lbc's to Helmholtz equation**
- **LBC only applied to (Exner) pressure correction ($\Pi' = \Pi^{n+1} - \Pi^n$) at one point around edge of domain – well-posed Dirichlet problem**
- **For mpp, lateral boundary files do not need external halos – can use a rim (>1 to allow for flow Courant number >1) around inner edge of domain**

- **Blending of lbc's still useful to match mass/pressure fields of driving and nested models**
- **Blending upsets geostrophic adjustment**
- **If no blending of lbc's then will need to filter small-scale outflow information otherwise reflection at the boundary (loss of transparency)**

UK 1.5 km domain



UKV_D5 1p5_to_4 Variable Resolution Domain



1.5km UK model plan



- **1.5km fixed resolution over UK with outer variable rim to 4km (perhaps 12km)**
- **3D VAR mainly over 1.5 km area**
- **Testing on new IBM starting January**
- **Parallel suite starts end of April**
- **Operational end-of-May**



The End